



# Skyline LINEAR HIGH BAY



- **DLC-Premium**
- **Luminous Efficacy of 131 lm/W**

ATG's Skyline Linear High Bay is built for the ground up for performance and versatility. The high-performance fixture is designed to meet DLC's stringent Premium requirements in a variety of use cases. Deployable in damp locations and temperatures ranging from -20C to 50C, this precisely constructed lamp is ideal for virtually all indoor commercial use.

Recommended mounting heights vary by model, and range from 15 to 35 feet. The Skyline Series comes with ATG's stellar 10-year manufacturer warranty.

### OPTICS

The Skyline's light distribution is optimized for professional environments requiring high levels of illumination and visual detail.

### CONSTRUCTION

The Skyline's housing is precisely formed for industrial environments. The fixture functions in damp locations and temperatures ranging from -20C to 50C.

### ELECTRICAL

The luminaire is available with wattages of 90, 160, 240, and 320W. Luminous efficacy is >130 Lm/W. Units are available with a standard 120-277V driver, or an optional 347-480V driver.

### MOUNTING

The Linear High Bay is best mounted via suspension using cable mount, pendant, or chain mount. Our lighting consultant can work with you to determine the optimal model for your mounting height.

### STANDARD FEATURES


### OPTIONS


### FINISH



**Sample Order: HBEL-2FT-90-50-F**

SERIES	LENGTH	WATTAGE	CCT	VOLTAGE	DIMMING	LENS	FINISH COLOR	OPTIONS
HBEL= Skyline HB	-2FT=2FT -4FT=4FT	-90=90W -160=160W -220=220W -320W=320W	-50=5000K -40=4000K	Blank=100-277V -V=347-480V	Blank=1-10V Dimming -ND=Non-Dimming	-C=Clear Lens -F=Frosted Lens	-XX -Blank=Standard	LOD= Bi-Level Sensor EOP=Office On/Off Sensor EM=Emergency Backup Battery

**Performance Data**




PART NO.	WATTS(W)	INPUT VOLTAGE(VAC)	EFFICACY(Lm/W)	LUMENS(Lm)	CRI	CCT (K)	PF	THD	L70 (Hours)	DIMENSIONS (L*W*H) (Inches)
HBEL-2FT-90W	90	120-277	131	11790	>80	4000 5000 5700	>0.9	<10%	100,000	24*13*4
HBEL-2FT-160W	162	120-277	131	21222	>80	4000 5000 5700	>0.9	<10%	100,000	24*17*4
**HBEL-4FT-220W	223	120-277	131	28213	>80	4000 5000 5700	>0.9	<10%	100,000	46*13*4
HBEL-4FT-320W	321	120-277	131	41920	>80	4000 5000 5700	>0.9	<10%	100,000	46*17*4


COLOR	HOUSING	LENS TYPE	CERTIFICATION	WARRANTY
Silver or Custom	Sheet Metal & PC Diffuser	Frosted or Clear	DLC, ETL	10 Years

*\*Not all versions of this product may be DLC-qualified. Please inquire with our sales team.*

*\*\*Model available by custom order. Lead time may be extended.*



\*\*\*grid scale is at 40 feet

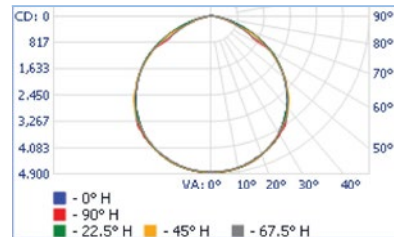

**Illuminance at a Distance**

Center Beam LUX	Beam Width
69.75 LUX	24.8M 25.3M
17.44 LUX	49.7M 50.5M
7.75 LUX	74.5M 75.8M
4.36 LUX	99.3M 101.0M
2.79 LUX	124.2M 126.3M
1.94 LUX	149.0M 151.5M

Vert. Spread: 112.3° Horiz. Spread: 113.1°

