


4-Zone RGB+CCT Remote

This advanced remote uses 2.4GHz RF for precise control up to 30m, supporting four zones and RGB+CCT lighting. It adjusts brightness, color, temperature, and flashing speed, offers 16 million colors, and includes a magnetic base for easy mounting.

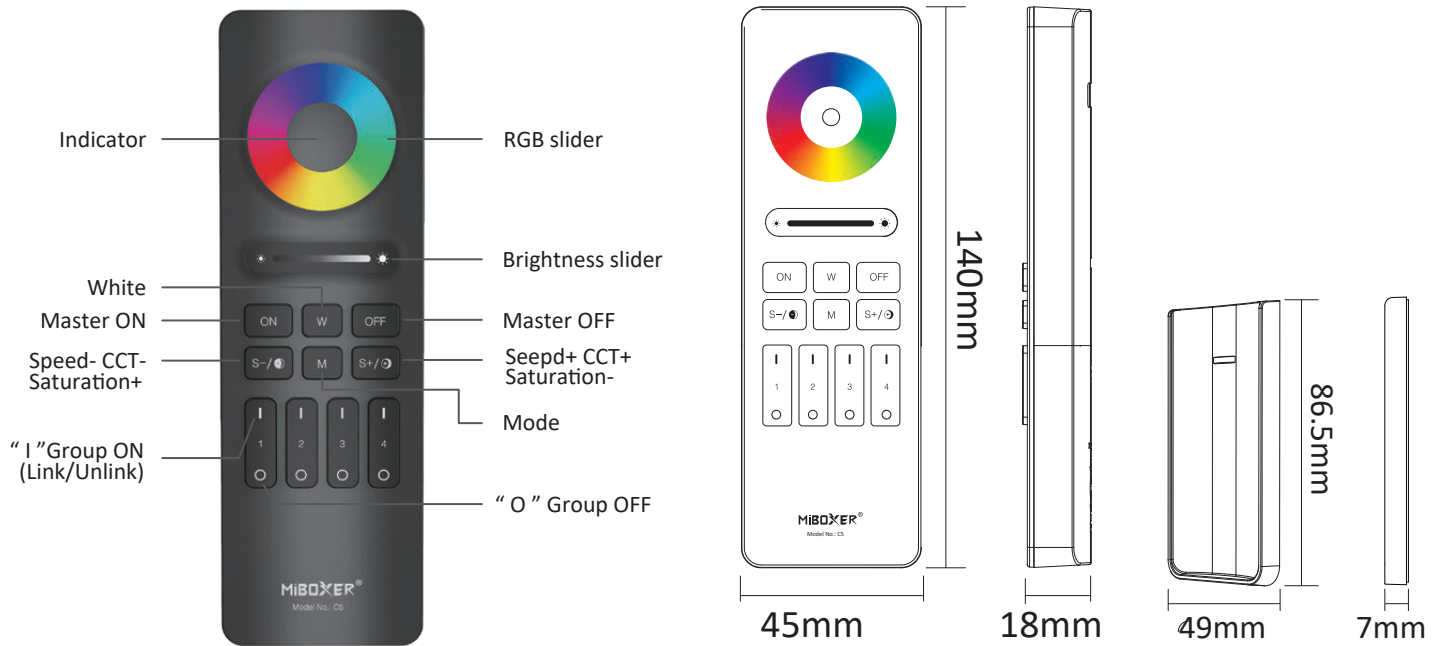

Compatible Fixtures

Outdoor/Indoor RGBW (RGB+3000K)	SL-OD-RGB30K-20-BA8
Tunable CCT, High Power Outdoor	SL-OD-CCT-HP-20-B8
Tunable CCT, Low Power Outdoor	SL-OD-CCT-LP-XX-B8
RGB High Power Indoor	ST-ID-RGB-HP-20-B8
RGB eStrip	LES-XX-RGB (XX: Length in feet)
Neon Flex	NFLX-XX-YY (XX: Length in feet; YY: Color temperature)
LED Hard Strip RGB	LV-HS-RGB-24T2-X (X: Size)

Specifications

Working Voltage	3V (AAA * 2PCS)
Standby Power Consumption	15 Microamperes
Transmitting Power	6dBm
RF	2.4GHz
Control Distance	30m
Modulation Method	GFSK
Operating Temperature	-10 to 40°C
Approvals	RoHS

Ordering Code(s)

• CNTRL-4Z-RGBCCT-RM

Project		Type	
Date		Contact	
Notes			