

WTZ SERIES

WTZ Series is an industry leading vapor tight luminaire robustly designed for a wide variety of environments. Its sealed and gasketed NSF listed fiberglass enclosure is easy to service and clean, ideal for maintaining a safe environment for food and beverage processing. With an enhanced feature set including industry leading ambient operating temperatures, extremely high efficiency, three scalable fixture lengths, wide lumen range, various high impact lens options and multiple mounting options make the WTZ Series the absolute luminaire for any vapor tight application.



Suitable Applications

- Coolers & Freezers
- Pharmaceutical
- Food & Beverage Prep Healthcare
 - Education
- Greenhouse
- Industrial

Parking Garage


















Features

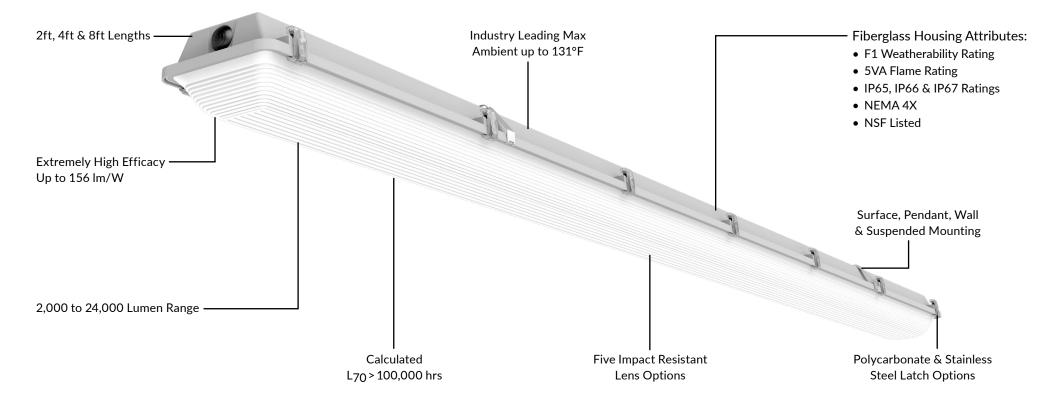

Factory Installed Options

- -40°F Cold Temperature Driver
- Emergency Battery Backups
- 7W to 12W Output
- -4°F Cold Temp Operation
- CEC Title 20 Compliant Options
- Generator Transfer Device
- 347V & 480V
- 10kV Surge Protector
- Stainless Steel Latches
- Tamper Proof Screws
- Threaded HUBs for Side Power Entry
- Cords
- Five Impact Resistant Lens Options
- Ribbed Frosted Acrylic Std. (RAFL)
- Shallow Clear Acrylic (SACL)
- Shallow Frosted Acrylic (SAFL)
- Shallow Clear Polycarbonate (SPCL)
- Shallow Frosted Polycarbonate (SPFL)

Controls Options

Advanced



- Economical Grouping Solution
- Occupancy & Daylight Functions
- Programmable with phone app
- Wireless Scalable Design
- No Gateway Required
- Learn More Here!

enlighted A Siemens Company

- Three Upgradable Tier Solutions
- Occupancy, Daylight, Energy Manager & Asset Tracking Capabilities
- Wireless Scalable Design
- Gateway for Enhanced Functionality

Learn More Here!



- Individual Fixture Control
- Occupancy & Daylight Functions
- Programmable with phone app
- No Gateway Required

Basic

- WLOS: On/Off
- WLOSPC: On/Off with Photocell
- BDxx: Preset Bi-Level Dimming
- MWS: On/Off Installed Integral
- USBD: User Selectable Bi-Level Dimming
- BDxxPC: Preset Bi-Level Dimming with Photocell
- MWUSBD: User Selectable Bi-Level Dimming Integral


Mounting Options



Suspended



Pendant



45° Angle Wall Mount



Surface



WTZ SERIES Narrow Linear Vapor Tight

